


DIGITAL HEIGHT GAUGES


DATA
OUTPUT

- Non waterproof
- Resolution: 0.01mm/0.0005"
- Buttons:
 - Type A: on/off, zero, mm/inch, ABS/INC, data hold, set
 - Type B and type C: on/off, zero, mm/inch, ABS/INC, data hold, TOL, set
- ABS/INC is for absolute and incremental measurement
- TOL is for tolerance measurement
- Carbide tipped scriber
- Made of stainless steel (except the base)
- Data output
- Supplied with dial test indicator holder
- Supplied with dust cover (except 1150-1500/2000)
- Power:
 - Type A: CR2032
 - Type B and type C: LR44
- Optional accessory:
 - clamp for protractors (code 2372-CLAMP, for 1150-300)


clamp for protractors (optional)
for 1150-300

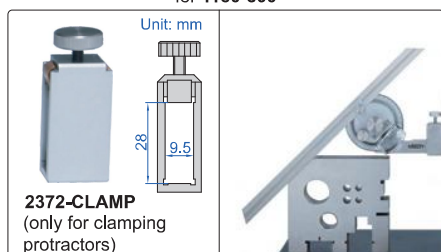

dial test indicator holder (included)

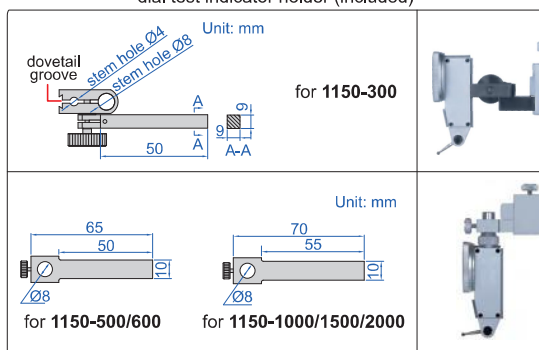


scriber (included)




1150-1000

1150-500


1150-300



type A



type B



type C

(mm)

Code	Range	Type	Accuracy	L	a1	a2	b	c1	c2	c3	d	e	f	Data output cable (optional)
1150-300	0-300mm/0-12"	A	±0.04mm	485	138	45	100	80	30	10	28	9	9	7315-22 (receiver is needed), 7302-22
1150-500	0-500mm/0-20"	B	±0.06mm	720	180	55	95	103	25	12	30	10	12	7315-1150 (receiver is needed), 7302-SPC7
1150-600	0-600mm/0-24"	B	±0.06mm	820	180	55	95	103	25	12	30	10	12	
1150-1000	0-1000mm/0-40"	C	±0.08mm	1275	250	80	125	110	39	15	50	10	15	
1150-1500	0-1500mm/0-60"	C	±0.12mm	1790	280	80	125	110	39	15	50	10	15	
1150-2000	0-2000mm/0-80"	C	±0.16mm	2290	280	80	125	110	39	15	50	10	15	