





DATA
OUTPUT

- Non waterproof
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, zero, mm/inch, preset +, preset -, ABS/INC
- Automatic power off, move the digital unit to turn on power
- Carbide tipped scriber
- Made of stainless steel (except the base)
- Battery CR2032
- Data output
- Supplied with dust cover
- With dial test indicator holder
- Optional accessory: wireless transmitter code **7315-22** (receiver is needed), clamp for protractors (code **2372-CLAMP**)

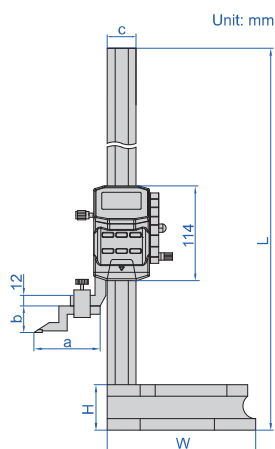

Unit: mm

scriber (included)



Unit: mm



1156-300




front



side


1156-1000

dial test indicator holder (included)

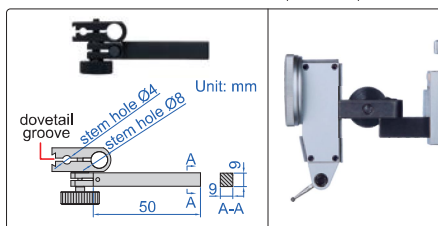

Unit: mm

clamp for protractors (optional)

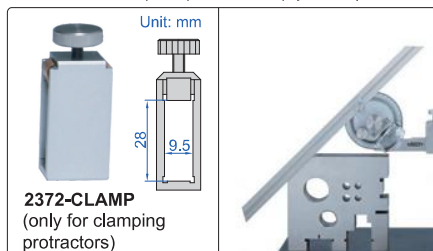

Unit: mm

2372-CLAMP
(only for clamping
protractors)

Code	Range	Accuracy	L	W	H	a	b	c	h
1156-300 *	0-300mm/0-12"	±0.03mm	515mm	180mm	55mm	80mm	30mm	35mm	9mm
1156-600 *	0-600mm/0-24"	±0.05mm	815mm	180mm	55mm	80mm	30mm	35mm	9mm
1156-1000 *	0-1000mm/0-40"	±0.07mm	1220mm	265mm	70mm	92mm	48mm	40mm	12mm

* Supplied with manufacturer inspection certificate