


SNAP-OPEN DIGITAL THREE POINTS BORE GAUGES




IP54
WATERPROOF

BUILT-IN
BLUETOOTH


Unit : mm



type A
6-12mm, steel
measuring points




type B
12-50mm, carbide
measuring points



type C
50-300mm, carbide
measuring points



3129-63

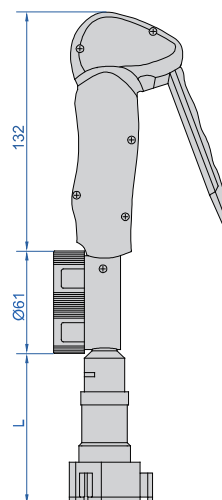

- Resolution: 0.001mm/0.00005"
- Display can be rotated by 270°
- Button function: on/off, zero setting, data preset, tolerance, data hold, mm/inch, measuring direction change, blue tooth, max./min./TIR, absolute/incremental measurement, data output
- Android and iPhone APP, USB type-C cable are included
- Easy and quick measurement
- Power: rechargeable Li-battery, for 30 hours continuous working (bluetooth transmission reduce working hours)
- Optional accessory: setting rings (code **6312**)

setting ring



6-100mm: included
100-300mm: **optional**

extension rod



included

(mm)

Code	Range	Type	Accuracy	Setting ring	Extension rod (included)	L	a	b	c
3129-8 *	6-8mm/0.24-0.31"	A	4µm	Ø6mm (included)	100mm	41mm	1.5	2.5	—
3129-10 *	8-10mm/0.31-0.39"	A	4µm	Ø8mm (included)	100mm	41mm	1.5	2.5	—
3129-12 *	10-12mm/0.39-0.47"	A	4µm	Ø10mm (included)	100mm	41mm	1.5	2.5	—
3129-16 *	12-16mm/0.47-0.63"	B	4µm	Ø16mm (included)	150mm	70mm	0.5	6	4.5
3129-20 *	16-20mm/0.63-0.79"	B	4µm	Ø16mm (included)	150mm	70mm	0.5	6	4.5
3129-25 *	20-25mm/0.79-0.98"	B	4µm	Ø25mm (included)	150mm	77mm	0.5	8	6
3129-30 *	25-30mm/0.98-1.18"	B	4µm	Ø25mm (included)	150mm	77mm	0.5	8	6
3129-40 *	30-40mm/1.18-1.57"	B	4µm	Ø40mm (included)	150mm	82mm	0.5	14	12
3129-50 *	40-50mm/1.57-1.97"	B	5µm	Ø40mm (included)	150mm	82mm	0.5	14	12
3129-63 *	50-63mm/1.97-2.48"	C	5µm	Ø62mm (included)	150mm	100mm	0.5	17.5	14.5
3129-75 *	62-75mm/2.44-2.95"	C	5µm	Ø62mm (included)	150mm	100mm	0.5	17.5	14.5
3129-88 *	75-88mm/2.95-3.46"	C	5µm	Ø87mm (included)	150mm	100mm	0.5	17.5	14.5
3129-100 *	87-100mm/3.43-3.94"	C	5µm	Ø87mm (included)	150mm	100mm	0.5	17.5	14.5
3129-125 *	100-125mm/3.94-4.92"	C	6µm	optional	150mm	144mm	0.9	29	25
3129-150 *	125-150mm/4.92-5.91"	C	6µm	optional	150mm	144mm	0.9	29	25
3129-175 *	150-175mm/5.91-6.89"	C	7µm	optional	150mm	144mm	0.9	29	25
3129-200 *	175-200mm/6.89-7.87"	C	7µm	optional	150mm	144mm	0.9	29	25
3129-225	200-225mm/7.87-8.86"	C	8µm	optional	150mm	144mm	0.9	29	25
3129-250	225-250mm/8.86-9.84"	C	8µm	optional	150mm	144mm	0.9	29	25
3129-275	250-275mm/9.84-10.83"	C	9µm	optional	150mm	144mm	0.9	29	25
3129-300	275-300mm/10.83-11.81"	C	9µm	optional	150mm	144mm	0.9	29	25

* Supplied with manufacturer inspection certificate