

ELECTRONIC LEVELS

INSIZE PLUS



**INSPECTION
CERTIFICATE**

DATA
OUTPUT

SHOCK
PROOF





VIDEO

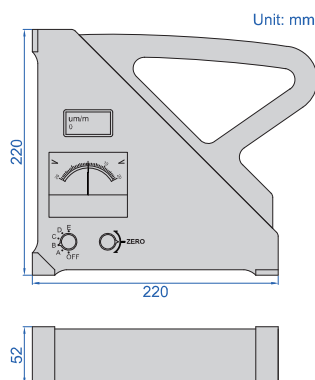

ISE-L051

- Shockproof
- Analogue and digital reading modes

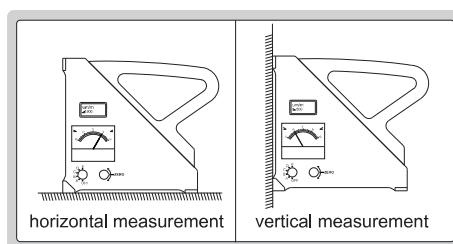

SPECIFICATION

Code	ISE-L051			ISE-L051L	
Analogue graduation (adjustable)	250µm/m (=0.014°)	50µm/m (=10")	10µm/m (=2")	5µm/m (=1")	1µm/m (=0.2")
Analogue range	±5000µm/m	±1000µm/m	±200µm/m	±100µm/m	±20µm/m
Digital reading resolution	horizontal: 1µm/m (=0.2")			horizontal: 1µm/m (=0.2"), angle: 0.01°	
Digital reading range	horizontal: 5000µm/m			horizontal: 5000µm/m, angle: 0.3~85°	
Accuracy	horizontal: ±1%			horizontal: ±1%, angle: ±0.7%	
Zero setting range	±1500µm/m				
Response time	<3s				
Data output	RS232				
Power supply	rechargeable Li-ion battery, provides power for 10h continuous working				
Dimension	220×220×52mm				
Net weight	4.4kg				

STANDARD DELIVERY

Main unit	1 pc
AC/DC adapter	1 pc

OPTIONAL ACCESSORY (MEASURING AND ANALYSIS SOFTWARE)

Code	ISE-L050-SOFTWARE	ISE-L050-SOFTWARE-MULTI
Function	Flatness measurement	Flatness measurement, Parallelism measurement, Straightness measurement