


UNIVERSAL CALIPERS

DATA
OUTPUT




1511-200

- Non waterproof
- Resolution: 0.01mm/0.0005"
- Buttons: on/off, set, mm/inch, preset (+, -)
- Automatic power off, move the digital unit to turn on power
- Battery CR2032
- Made of stainless steel

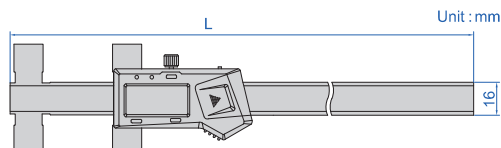

preset buttons



With data interface (optional wireless transmitter code 7315-25, receiver is needed)

Code	Range *	Accuracy	L
1511-200	0-200mm/0-8"	±0.06mm	286mm
1511-300	0-300mm/0-12"	±0.06mm	400mm

Built-in wireless (receiver code 7315-2/3/6/7/8/9 is needed)


Code	Range *	Accuracy	L
1511-200WL	0-200mm/0-8"	±0.06mm	286mm
1511-300WL	0-300mm/0-12"	±0.06mm	400mm

Upper and lower jaws can be fitted with a variety of points




*The range changes according to different points

Flat head groove points (optional)

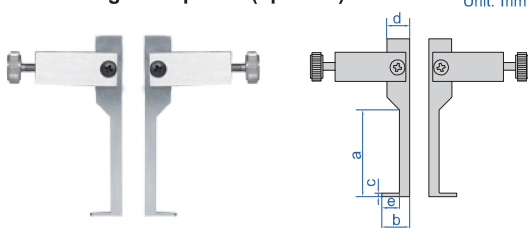


Code	a(mm)	b(mm)	c(mm)	d(mm)	e(mm)
1511-A01	12	2.5	0.4	8	1
1511-A02	16	3.5	0.4	8	2
1511-A03	25	7.5	0.6	8	5
1511-A04	30	10	1	8	6.5
1511-A05	80	22	1.5	12	10

Centerline points (optional)

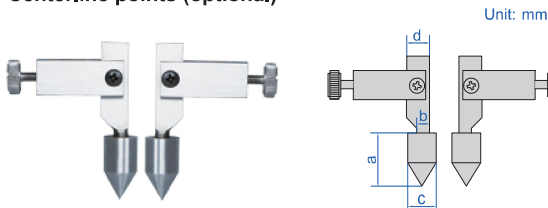


Code	a(mm)	b(mm)	c(mm)	d(mm)
1511-E01	10	4	Ø5	8
1511-E02	20	4	Ø10	8
1511-E03	25	8	Ø15	12

Cylindrical groove points (optional)



Code	a(mm)	b(mm)	c(mm)	d(mm)	e(mm)
1511-B01	20	5	Ø1	8	2
1511-B02	40	10	Ø2	8	5
1511-B03	80	22	Ø2	12	10
1511-D01	63	12	Ø2	12	7
1511-D02	63	12	Ø4	12	7

Cylindrical groove points (optional)



Code	a(mm)	b(mm)	c(mm)	d(mm)	e(mm)
1511-C01	63	12	Ø2	12	7
1511-C02	63	12	Ø4	12	7