




DATA
OUTPUT



WIRELESS DIGITAL INDICATORS

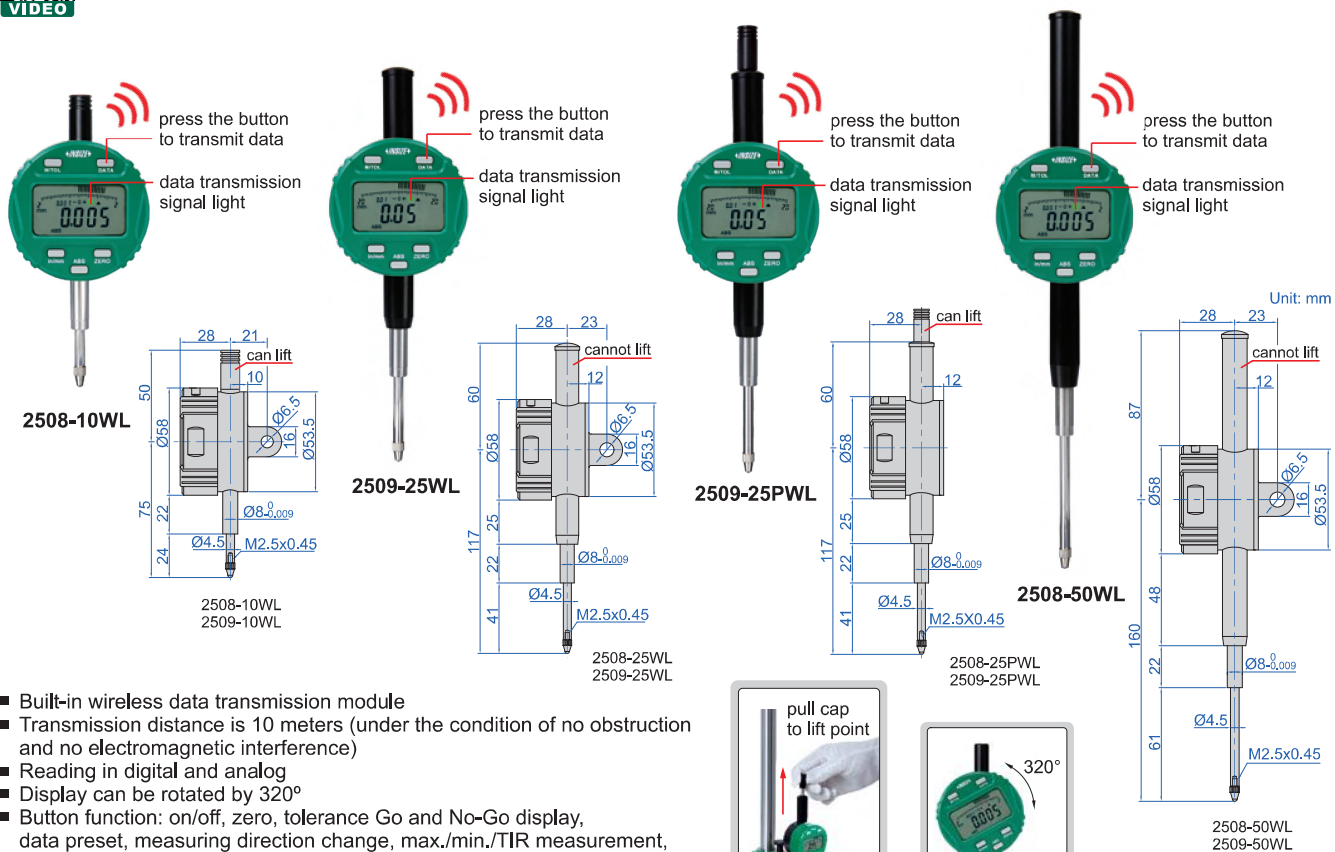

- Built-in wireless data transmission module
- Transmission distance is 10 meters (under the condition of no obstruction and no electromagnetic interference)
- Reading in digital and analog
- Display can be rotated by 320°
- Button function: on/off, zero, tolerance Go and No-Go display, data preset, measuring direction change, max./min./TIR measurement, inch/metric conversion, absolute/incremental measurement, data output
- Keep preset data and tolerance data in memory after restart
- Automatic power off (time is adjustable)
- Power: rechargeable Li-battery
- Optional accessory: receiver (code 7315-2/3/6/7/8/9), backs, contact points




Resolution 0.001mm/0.00005"


Code	Range	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2508-10WL*	12.7mm/0.5"	5μm	2μm	1.5N	can lift	lug back
2508-25WL*	25.4mm/1"	5μm	3μm	2.2N	cannot lift	lug back
2508-50WL*	50.8mm/2"	6μm	3μm	2.5N	cannot lift	lug back
2508-10FWL*	12.7mm/0.5"	5μm	2μm	1.5N	can lift	flat back
2508-25FWL*	25.4mm/1"	5μm	3μm	2.2N	cannot lift	flat back
2508-50FWL*	50.8mm/2"	6μm	3μm	2.5N	cannot lift	flat back
2508-25PWL*	25.4mm/1"	5μm	3μm	2.2N	can lift	flat back
2508-50PWL*	50.8mm/2"	6μm	3μm	2.5N	can lift	flat back

Resolution 0.01mm/0.0005"

Code	Range	Accuracy	Hysteresis	Maximum measuring force	Cap	Remark
2509-10WL*	12.7mm/0.5"	20μm	10μm	1.5N	can lift	lug back
2509-25WL*	25.4mm/1"	20μm	10μm	2.2N	cannot lift	lug back
2509-50WL*	50.8mm/2"	30μm	10μm	2.5N	cannot lift	lug back
2509-10FWL*	12.7mm/0.5"	20μm	10μm	1.5N	can lift	flat back
2509-25FWL*	25.4mm/1"	20μm	10μm	2.2N	cannot lift	flat back
2509-50FWL*	50.8mm/2"	30μm	10μm	2.5N	cannot lift	flat back
2509-25PWL*	25.4mm/1"	20μm	10μm	2.2N	can lift	flat back
2509-50PWL*	50.8mm/2"	30μm	10μm	2.5N	can lift	flat back

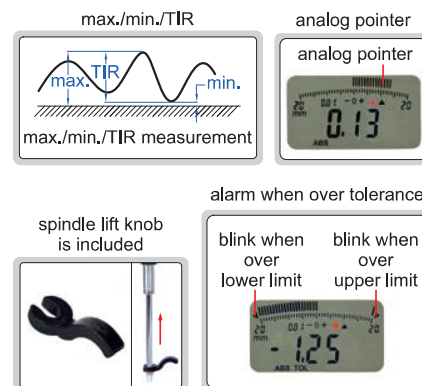

application

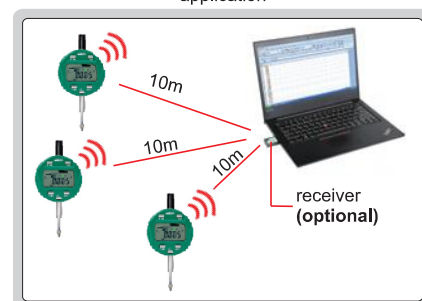

* Supplied with manufacturer inspection certificate