


BUILT-IN  
BLUETOOTH


2510-101F

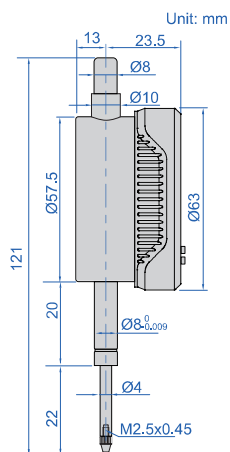

analog pointer

analog pointer



alarm when over tolerance

over upper limit




within tolerance



over lower limit



max./min./TIR



spindle lift knob is  
included


- Reading in digital and analog
- Button function: on/off, zero, data preset, tolerance Go and No-Go display, inch/metric conversion, measuring direction change, max./min./TIR measurement, absolute/incremental measurement, bluetooth on/off
- Automatic power off (time is adjustable)
- Keep preset data and tolerance data in memory after restart
- Data output:  
real-time data output with USB cable (Virtual Com Port)  
bluetooth data output (data can be transmitted to Android and iphone APP, transmission distance is 20m)
- Android and iPhone APP, USB type-C cable are included
- USB type-C port
- Power: rechargeable Li-battery
- Optional accessory: contact points


| Code       | Range       | Resolution       | Accuracy | Hysteresis | Maximum measuring force | Cap         | Remark    |
|------------|-------------|------------------|----------|------------|-------------------------|-------------|-----------|
| 2510-10F*  | 12.7mm/0.5" | 0.01mm/0.0005"   | 10µm     | 10µm       | 1.5N                    | cannot lift | flat back |
| 2510-101F* | 12.7mm/0.5" | 0.001mm/0.00005" | 3µm      | 2µm        | 1.5N                    | cannot lift | flat back |

\*Supplied with manufacturer inspection certificate

Application

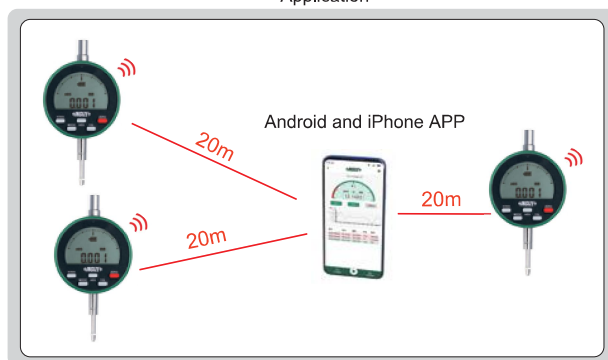

Can connect up to 7pcs indicators simultaneously  
(real time data display)

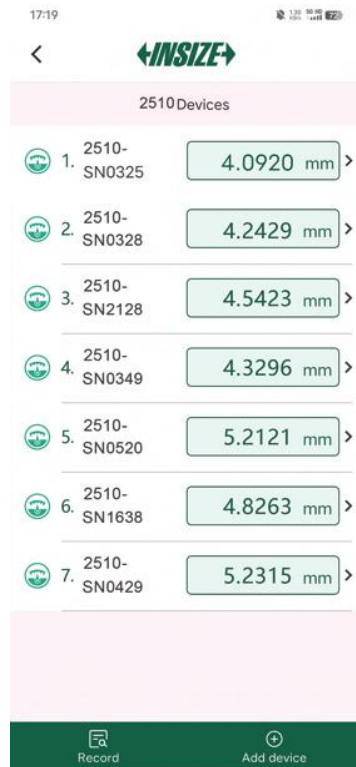

Transmission interface for single digital indicator

