




DATA
OUTPUT

IP65
WATERPROOF


INSPECTION
CERTIFICATE

QUICK FEEDING DIGITAL OUTSIDE MICROMETERS


QUICK MEASUREMENT
2MM FEEDING OF EACH TURN

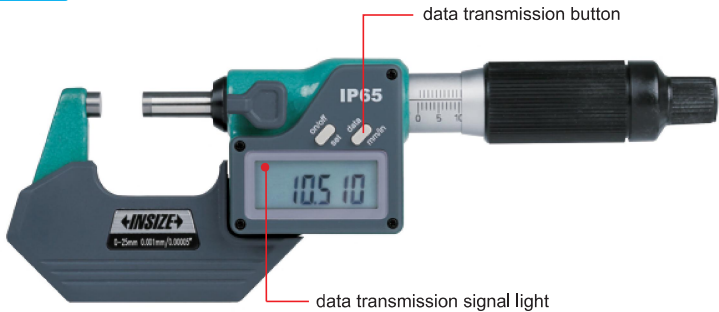

3105-25

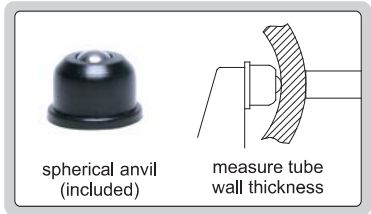

- 2mm feeding of each turn
- IP65 dust/waterproof
- Button function: on/off, set, mm/inch, data transmission
- Automatic power off
- Carbide measuring faces, friction thimble
- Supplied with spherical anvil
- Supplied with setting standards (except 0-25mm/0-1")
- Power:
with data interface: CR2032
built-in wireless: rechargeable lithium battery

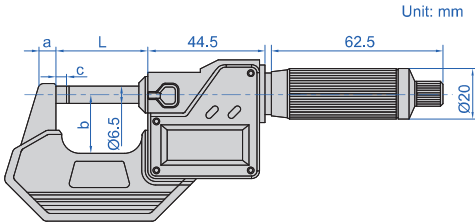

Built-in wireless (receiver
code 7315-2/3/6/7/8/9 is needed)

Code
3105-□□□□WL

Code examples:

Original code	Wireless code
3105-25	3105-25WL
3105-50	3105-50WL

With data interface (optional wireless transmitter code 7315-31, receiver is needed) (mm)

Code	Range	Resolution	Accuracy	L	a	b	c
3105-25*	0-25mm/0-1"	0.001mm/0.00005"	±2μm	34.5	6	25	3
3105-50*	25-50mm/1-2"	0.001mm/0.00005"	±2μm	59.5	8	32	3
3105-75*	50-75mm/2-3"	0.001mm/0.00005"	±3μm	84.5	8	44.5	3
3105-100*	75-100mm/3-4"	0.001mm/0.00005"	±3μm	109.5	8	57	3
3105-125	100-125mm/4-5"	0.001mm/0.00005"	±3μm	135	10	70	3
3105-150	125-150mm/5-6"	0.001mm/0.00005"	±3μm	160.5	10	82	3
3105-175	150-175mm/6-7"	0.001mm/0.00005"	±4μm	186	12	94.5	5.5
3105-200	175-200mm/7-8"	0.001mm/0.00005"	±4μm	211.5	12	107	5.5
3105-225	200-225mm/8-9"	0.001mm/0.00005"	±4μm	236	23	129.5	5.5
3105-250	225-250mm/9-10"	0.001mm/0.00005"	±4μm	261.5	23	142.5	5.5
3105-275	250-275mm/10-11"	0.001mm/0.00005"	±5μm	287	23	155	5.5
3105-300	275-300mm/11-12"	0.001mm/0.00005"	±5μm	312.5	23	167.5	5.5

* Supplied with manufacturer inspection certificate