

IP65
WATERPROOF


DATA
OUTPUT

POINTS CAN BE
CUSTOMIZED

DIGITAL TUBULAR INSIDE MICROMETERS WITH INTERCHANGEABLE POINTS



- IP65 dust/waterproof
- Resolution: 0.001mm/0.00005"
- Accuracy: $(3+n+L/50)\mu\text{m}$
n=number of rods
L=maximum measuring length (mm)
- Button function: on/off, set, mm/inch, data transmission
- Data output
- Automatic power off
- Power:
with data interface: CR2032
built-in wireless: rechargeable lithium battery
- Optional accessory: gauge blocks (code **4101-B200**),
gauge block holder (**6886** series),
gauge block accessory (code **6881-C**)

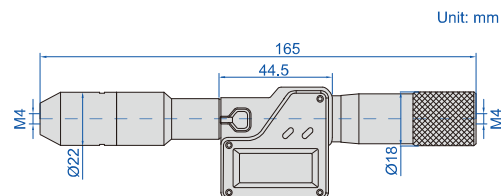

With data interface (optional wireless transmitter code 7315-31, receiver is needed page 8)

Code	Range *	Travel of micrometer head	Extension rods
3525-225	200-225mm	25mm	—
3525-1050	200-1050mm	25mm	25mm, 50mm (2 pcs), 100mm, 200mm, 400mm
3525-1550	200-1550mm	25mm	25mm, 50mm (2 pcs), 100mm (2 pcs), 200mm, 400mm (2 pcs)
3525-2050	200-2050mm	25mm	25mm, 50mm (2 pcs), 100mm, 200mm (2 pcs), 400mm (3 pcs)

*Range after installing ball points

Built-in wireless (receiver
code 7315-2/3/6/7/8/9 is needed)

Code
3525-□□□□WL

Code examples:


Original code	Wireless code
3525-225	3525-225WL
3525-1050	3525-1050WL

Ball points (optional)**

- Supplied in pair
- Made of carbide

Code	SØD
3525-S7	7mm
3525-S8	8mm
3525-S9	9mm
3525-S10	10mm

Code	SØD
3525-S11	11mm
3525-S12	12mm
3525-S13	13mm
3525-S14	14mm
3525-S15	15mm



**Points can be customized according to customers' requirements