

WEIGHING SCALES (BASIC TYPE)

- LCD display, with backlight
- Zero-setting, subtracting tare value, checking alarm
- Simple counting, accumulation
- Peak (max.) and tracking mode
- Double weighing pan in stainless steel and plastic
- Overload alarm
- Unit: kg, g, t, lb, tj, hj, lb-oz



8007-6

OPTIONAL ACCESSORY (for scales with RS232)


Alarm light	customizable
Large display	8007-SCREEN



large display (optional)



alarm light (optional)

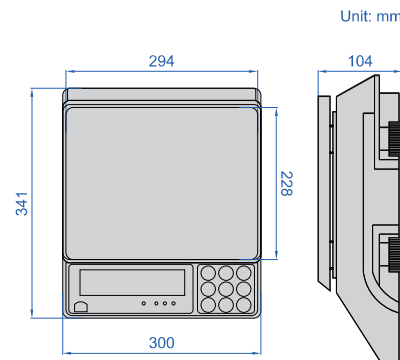

Unit: mm

SPECIFICATION

Code	8007-6	8007-15	8007-30	8007-6D	8007-15D	8007-30D
Maximum weighing	6kg	15kg	30kg	6kg	15kg	30kg
Minimum weighing	4g	10g	20g	4g	10g	20g
Resolution (d)	0.2g	0.5g	1g	0.2g	0.5g	1g
Accuracy (m is load)	m≤1kg: ±1g 1kg<m≤4kg: ±2g m>4kg: ±3g	m≤2.5kg: ±2.5g 2.5kg<m≤10kg: ±5g m>10kg: ±7.5g	m≤5kg: ±5g 5kg<m≤20kg: ±10g m>20kg: ±15g	m≤1kg: ±1g 1kg<m≤4kg: ±2g m>4kg: ±3g	m≤2.5kg: ±2.5g 2.5kg<m≤10kg: ±5g m>10kg: ±7.5g	m≤5kg: ±5g 5kg<m≤20kg: ±10g m>20kg: ±15g
Output	no			RS232		
Operation temperature	0~40℃					
Power	rechargeable lead acid battery (6V/4Ah)					
Dimensions of pan	294×228mm					