


AC/DC DIGITAL CLAMP METER CODE 9312-CB120

- 6000 counts display
- 28mm jaw opening
- NCV detection with light and sound alarm
- Live/neutral wire measurement function
- True RMS measurement
- Auto ranging
- REL (zero) function
- Data hold
- Polarity indication
- LCD screen with backlight
- Low battery indication
- Auto power off
- Safety rating: CAT III 300V/CAT II 600V



K-type thermocouple (included)

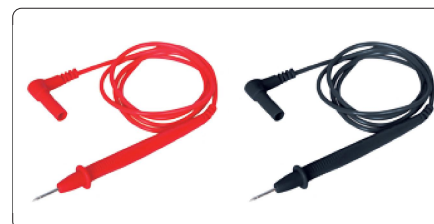

test leads (included)

STANDARD DELIVERY

Main unit	1 pc
Battery (AAA)	2 pcs
Test lead	2 pcs
K-type thermocouple	1 pc

SPECIFICATION

Function	Range	Resolution	Accuracy **
DC current	60.00A/600.0A	0.01A/0.1A	±(2%+5d)
AC current *	60.00A/600.0A	0.01A/0.1A	±(2%+5d)
DC voltage	600.0mV	0.1mV	±(0.7%+3d)
	6.000V/60.00V/600.0V	0.001V/0.01V/0.1V	±(0.5%+2d)
AC voltage *	6.000V	0.001V	±(1%+5d)
	60.00V/600.0V	0.01V/0.1V	±(0.8%+5d)
AC voltage frequency	10Hz~60kHz	0.01Hz~0.01kHz	±(0.5%+2d)
Resistance	600.0Ω	0.1Ω	±(1%+2d)
	6.000kΩ/60.00kΩ/600.0kΩ	0.001kΩ/0.01kΩ/0.1kΩ	±(0.8%+2d)
	6MΩ/60MΩ	0.001MΩ/0.01MΩ	±(2.5%+5d)
Capacitance	60.00nF/600.0nF/6.000μF/ 60.00μF/600.0μF	0.01nF/0.1nF/0.001μF/ 0.01μF/0.1μF	±(4%+5d)
	6.000mF/60.00mF	0.001mF/0.01mF	±10%
Frequency	10Hz~10MHz	0.01Hz~0.01MHz	±(0.1%+4d)
Temperature	-40~1000°C	-40~40°C	1°C
		>40~500°C	1°C
		>500~1000°C	1°C
	-40~1832°F	-40~104°F	1°F
		>104~932°F	1°F
		>932~1832°F	1°F
Duty cycle	0.1%~99.9%	0.1%	±(3.0%+5d)
Diode test	0V~6V		
Continuity check	<30Ω		
Power supply	2×1.5V AAA batteries		
Dimension (L×W×H)	215×63×36mm		
Weight	230g		

* AC current frequency response: 50Hz~400Hz, AC voltage frequency response: 45Hz~400Hz, true RMS display

** d is least reading