

## AUTO LEVEL CODE TSB-A30



- Widely used in surveying and mapping engineering, construction engineering and many other precise measurement fields
- Formed hanging wires and magnetic dampers are adopted
- High anti-interference ability, adaptable to complex environments



tripod (included)

### SPECIFICATION


Standard deviation of round trip leveling measurement per kilometer	using indium steel ruler	1.5mm
	using a tower ruler	2.5mm
Telescope magnification		30X
Field of view		1° 30'
Shortest visible distance		0.6m
Stadia multiplication constant		100
Stadia addition constant		0
The working range of the compensator		±10'
Setting accuracy		±0.5"
Round level bubble accuracy		8' /2mm
Angle disk graduation value		1° /1gon
Dimension (L×W×H)		216×128×138mm
Weight		1.55kg

### STANDARD DELIVERY

Main unit	1 pc
Tripod	1 pc

### TOWER RULER (OPTIONAL)

Code	TSB-A30-4M	TSB-A30-5M
Measuring range	4m	5m
Resolution	1mm	
Full scale accuracy	±3mm	
Precision per decimeter	±1mm	
Precision per centimeter	±1mm	

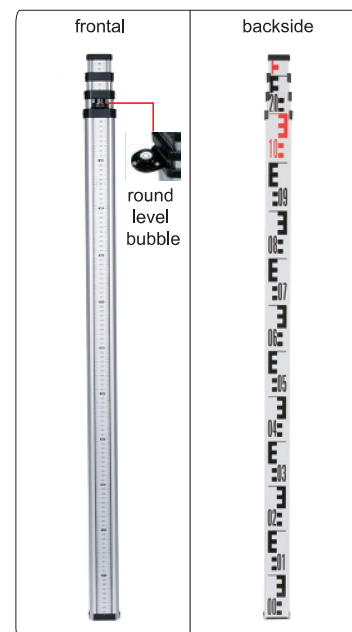

TSB-A30-4M tower ruler (optional)