

WEIGHING SCALES (BASIC TYPE)

- Double weighing pan in 430 stainless steel and plastic
- Zero-setting, weighing, subtracting tare value, simple counting
- Checking alarm, accumulation
- Peak (max.) and tracking mode
- LCD display, with backlight
- Unit: kg, g, t, lb, tj, hj, lb-oz



alarm light (optional)



printer (optional)




large display (optional)



8007-6

Unit: mm

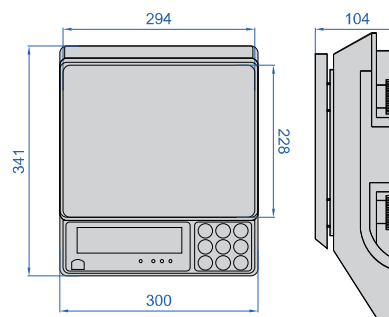

SPECIFICATION

Dimension of pan	294×228mm
Operation temperature	0~40°C
Operation humidity	≤85%RH
Power supply	rechargeable lead acid battery (6V/4Ah)
Dimension (L×W×H)	341×300×104mm

Code	Weighing capacity	Minimal load	Readability (d)	Repeatability	Linearity	Stabilization time	Output
8007-2A	2kg	20g	1g	±1g	±1g	1s	no
8007-3A	3kg	20g	1g	±1g	±1g	1s	
8007-5A	5kg	40g	2g	±2g	±2g	1s	
8007-6A	6kg	40g	2g	±2g	±2g	1s	
8007-10A	10kg	100g	5g	±5g	±5g	1s	
8007-15A	15kg	100g	5g	±5g	±5g	1s	
8007-20A	20kg	100g	5g	±5g	±5g	1s	
8007-30A	30kg	200g	10g	±10g	±10g	1s	
8007-6	6kg	4g	0.2g	±0.4g	±1g	2s	
8007-15	15kg	10g	0.5g	±1g	±2.5g	2s	
8007-30	30kg	20g	1g	±2g	±5g	2s	
8007-2AD	2kg	20g	1g	±1g	±1g	1s	RS232
8007-3AD	3kg	20g	1g	±1g	±1g	1s	
8007-5AD	5kg	40g	2g	±2g	±2g	1s	
8007-6AD	6kg	40g	2g	±2g	±2g	1s	
8007-10AD	10kg	100g	5g	±5g	±5g	1s	
8007-15AD	15kg	100g	5g	±5g	±5g	1s	
8007-20AD	20kg	100g	5g	±5g	±5g	1s	
8007-30AD	30kg	200g	10g	±10g	±10g	1s	
8007-6D	6kg	4g	0.2g	±0.4g	±1g	2s	
8007-15D	15kg	10g	0.5g	±1g	±2.5g	2s	
8007-30D	30kg	20g	1g	±2g	±5g	2s	

OPTIONAL ACCESSORY (for scales with RS232)

Alarm light	customizable
Large display	8007-SCREEN
Printer	8391-PRN10